

Data sheet

Immersible pump



Model type: 4COA2-14
order no.:

Rated voltage: 3x400V
Rated frequency: 50Hz
Rated power: 0,09kW
Rated current: 0,26 (by 400V)
Assured current: 0,35A (by 400V)

Head: 4m
Pressure: 40kPa
Flow: 25l/min

Used material

Impeller	acetal copolymer
Chamber bottom	Al alloy
chamber bottom screws	stainless steel
Pump body	Al alloy
Pump tubes	1.0026
Shaft	1.0060

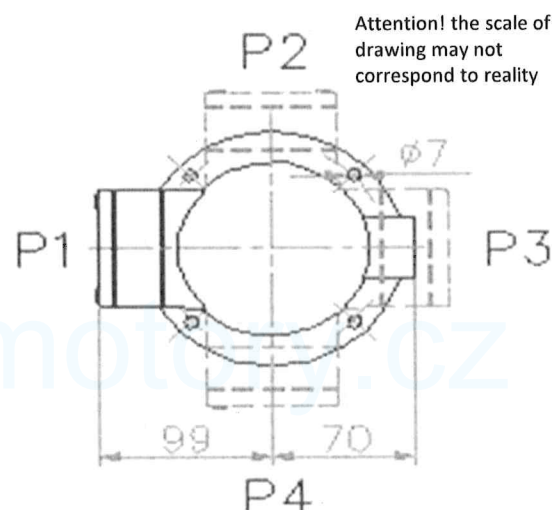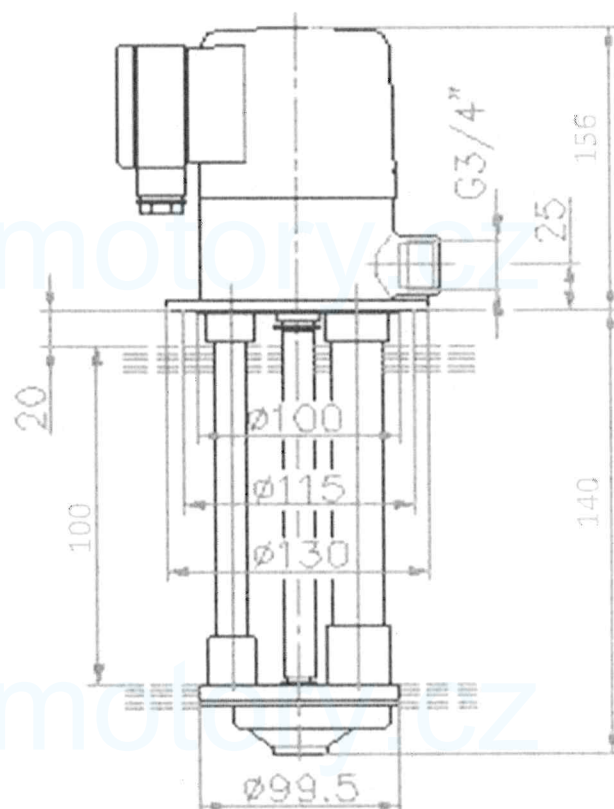

Area: safe area
Operating conditions: from -20°C to 40°C, max. 1000m above sea level
Pumped liquid: non flammable, max. viscosity 150mm²s⁻¹; temperature 0-60 °C
Size of impurities: Max.0,5mm

Color: base color, grey
Weight: 3,7kg

