


P050FB05C0-QB3-

Price

Lead time

Configuration

Type:	P
Size:	050
Input:	71 B14 ø105
Output shaft/bore:	Standard ø25
Mounting:	FB
Mounting position:	B3
Input bore:	-
Coupling:	-



Technical data

Input rpm (n_1):	1400 min⁻¹
Output rpm (n_2):	53.85 min⁻¹
Ratio (i):	26.00 (05)
Nominal power (P_{1R}):	0.54 kW
Nominal torque (M_{2R}):	66 Nm
Dynamic efficiency (RD):	69%

Selection

Motor power (P_{1M}):	0.37 kW
Output torque (M_{2M}):	45 Nm
Service factor (f.s.):	1.5

Lubrication

Oil quantity:	0.14l
AGIP:	Telium VSF 320
SHELL:	Omala S4 WE 320

On our website


Features	Irreversibility
How to order	Thermal limit
Dimension	Atex certification
Accessories/options	Installation check list
Electric motors	Spare parts list
Selection guide - fs	Complete catalogue
Mounting pos. - lubricant	Selection by power (xls)
Calc. the overhung load	

Direction of rotation



Axial and radial loads


Input shaft



n_2 (min ⁻¹)	FA (N)	FR (N)
1400	76	380

*Strong axial loads in the DX direction are not allowed

Output shaft



n_2 (min ⁻¹)	FA (N)	FR (N)
200	240	1200
150	280	1400
100	300	1500
75	340	1700
50	380	1900
25	480	2500
15	560	2800


Note

3D dimensions on the Web

P050**FB**... Basic wormbox
Riduttore base

Gearbox weight
peso riduttore **3.00 kg**


M. flanges	Kit code	øF	A
63B5	K050.4.041	138	78.5
71B5	K050.4.042	160	76
80B5	K050.4.043	200	76.5
56B14	KC40.4.049	80	76
63B14	K050.4.047	90	78.5
71B14	K050.4.045	105	76
80B14	K050.4.046	120	76.5

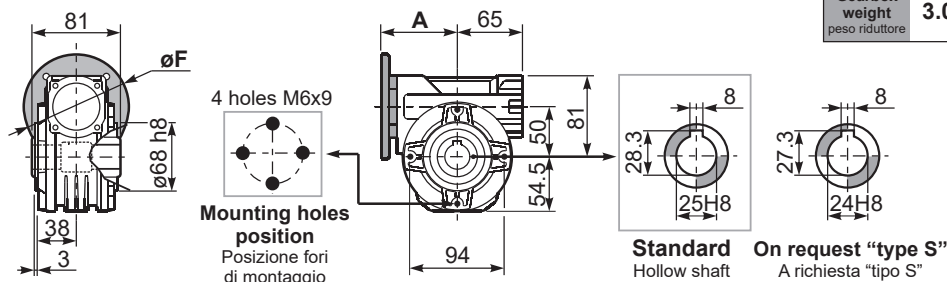

P050**PA**... Feet
Piedini

P050**PB**... Feet
Piedini


P050**PV**... Feet
Piedini

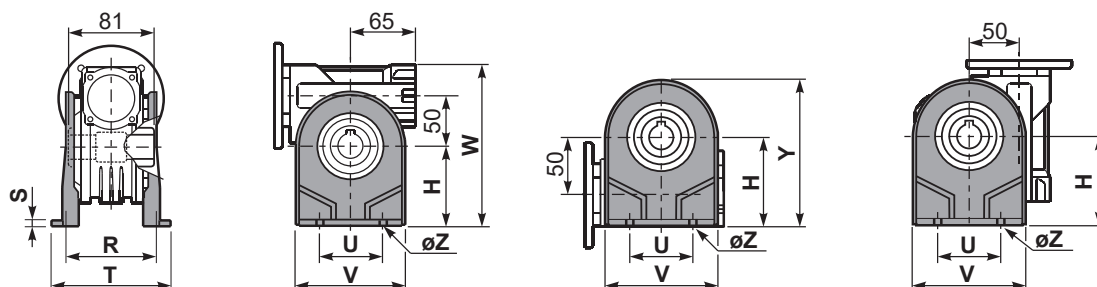

	H	R	S	T	U	V	Y	W	øZ	kit code
type B	82	98.5	3.5	123	63	113	138.5	163	ø10.5	K050.9.022
type S	85	96	10	114	85	110	139.5	166	ø10	KS050.9.023

P050**FC**... Output flange
Flangia uscita

P050**BR**... Reaction arm
Braccio di reazione

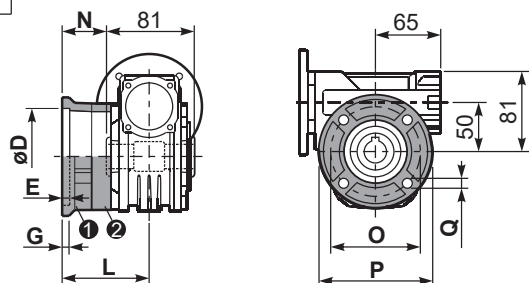


type B	øD	E	G	L	N	O	P	Q	kit code
FC	70 ^{+0.20} _{+0.15}	9	12	85	44.5	90	123	10.5	1 K050.9.010 2 -
FL	70 ^{+0.20} _{+0.15}	9	12	114.5	74	90	123	10.5	1 K050.9.010 2 K050.0.200

type S	øD	E	G	L	N	O	P	Q	kit code
F1	110 ^{+0.20} _{+0.15}	4	11	83.5	43	130	160	10	1 KS050.9.012 2 -
F2	70 ^{+0.20} _{+0.15}	9	12	76.5	36	90	123	10.5	1 KS050.9.014 2 -
F3	95 ^{+0.035} ₀	4	10	66.5	26	115	140	10	1 KS050.9.013 2 -

P050.....**S**... Single Shaft
Albero lento semplice


P050.....**D**... Double Shaft
Albero lento bisp.

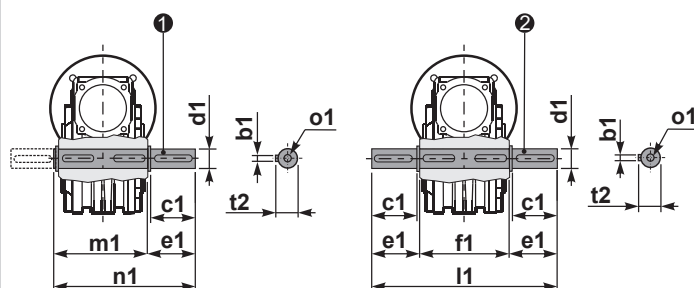

1 kit cod. K050.5.028 type B
kit cod. KS050.5.030 type S

2 kit cod. K050.5.029 type B

R050FB... Input shaft
Albero in entrata

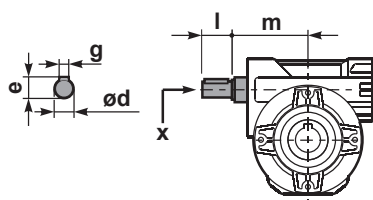

	ød	e	g	l	m	x	kit code
type B	16 h6	18	5	30	74.5	M6x16	1 K050.5.006 PAM71 2 K050.5.007 PAM80
type S	14 h6	16	5	30	74.5	M5x10	1 KS050.5.008 PAM71 2 KS050.5.009 PAM80

	b1	c1	d1	e1	f1	l1	m1	n1	t2	o1
type B	8	52	25 ^{-0.005} _{-0.020}	59.5	81	200	86.5	146	28	M8x20
type S	8	50	24 ^{-0.005} _{-0.020}	68.8	-	-	86.5	155	27	M8x20